

LP Ozone Pump Compressor/Vacuum Pump

LP Ozone Pump is completely oil-less and comes with our relentless commitment to quality, performance and overall service to our customers. Our business mindset is to provide customers exactly what they require. Flexible component and product designs allow for a wide range of customization in flow and pressure performance, input power, port locations, accessories and more!


FEATURES:

- Thin-walled, hard-coated anodized cylinder
- Oil-less, non-lube PTFE piston seal
- Permanently lubricated ball bearings
- UL recognized motor & thermal protector
- Balanced eccentric/connecting rod assembly
- Epoxy E-coated wetted components
- Stainless steel valves, retainers and screws
- Die cast aluminum components
- Efficient 4.4" diameter motor
- Oversized front mounted 9-blade fan



BENEFITS:

- Ozone resistant
- Long service-free life
- Low vibration & sound level
- Corrosion resistance
- Cool operating temperatures
- Electrically safe
- Low power consumption
- Restart against load

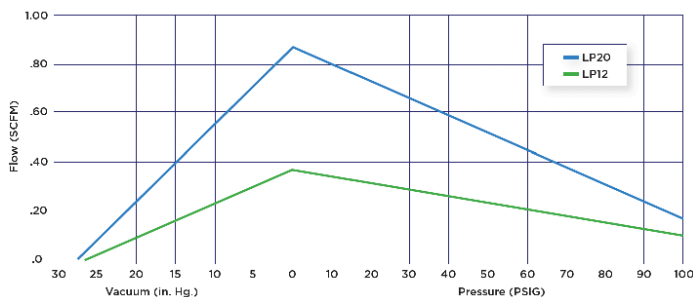

| SKU | Model |
|-------|---------------|
| 32213 | LP Ozone Pump |

LP Ozone Pump Performance Data

| | |
|---------------------------------|-----------------|
| Head Configuration | Pressure/Vacuum |
| Free Air Flow | 0.37 SCFM |
| Max Continuous Pressure | 70 PSIG |
| Max Intermittent Pressure | 100 PSIG |
| Max Restart Pressure | 100 PSIG |
| Max Vacuum | 27" Hg |
| Max Restart Vacuum | 27" Hg |
| Max Ambient Air Temp | 104° F |
| Min Ambient Start Temp | 50° F |
| Motor Voltage/Frequency | 115V/60Hz |
| Motor Type | Shaded Pole |
| Current at Rated Load | 3.8 Amps |
| Power at Rated Load | 190 Watts |
| Starting Current (Locked Rotor) | 5.2 Amps |
| Min Full Load Speed | 1610 RPM |
| Thermal Protector | Yes |
| Net Weight | 6.6 lb |