

CHEM-FEED® STAR SYSTEM SHIPS COMPLETE

Blue-White's CHEM-FEED® STAR SYSTEM is shipped complete with the CHEM-FEED® C-1500N metering pump of your choice, STANDARD or DELUXE.

The Star System includes the CHEM-FEED C-1500N metering pump of your choice mounted on a sturdy polyethylene tank. Flooded suction assists in priming.


For a thoughtfully designed top quality Metering System, choose the Star System.



STAR SYSTEM C-1500N BENEFITS

- > Three tank capacities to choose from: 7 gallon, 15 gallon, or 30 gallon.
- > All necessary accessories are included.
- > The Polyethylene tank has extra heavy wall thickness for stability with U.V. inhibitor for sunlight protection.
- > Lid positions include open, closed, or vent.
- > Convenient rectangle shape.
- > Raised off the floor for easy wash down.

STAR SYSTEM



	DIM 'A'	DIM 'B'	DIM 'C'	DIM 'D'	DIM 'E'	SHIP WT.
7 GALLON TANK	17.5 (44.5)	12.0 (30.5)	16.0 (41.0)	7.8 (19.7)	17.0 (43.0)	19 LB. (9 Kg)
15 GALLON TANK	22.0 (56.0)	15.5 (39.0)	19.5 (50.0)	7.8 (19.7)	17.0 (43.0)	28 LB. (13 Kg)
30 GALLON TANK	27.0 (69.0)	20.0 (51.0)	24.0 (61.0)	7.8 (19.7)	17.0 (43.0)	36 LB. (16 Kg)

STAR SYSTEM ORDERING GUIDELINES

STANDARD MODEL NUMBER	MAX OUTPUT @ 0 PSI				Max Strokes Per minute	MAX PSI
	GPD	GPH	LPH	OZ/MIN		
T15N0(*)2X026V0(****)	3.4	0.2	0.5	0.3	14	125
T15N1(*)2X026V0(****)	8.3	0.3	1.3	0.7	30	125
T15N3(*)2X026V0(****)	16.3	0.6	2.5	1.4	60	125
T15N2(*)2X000V0(****)	26.6	1.1	4.2	2.4	45	125
T15N4(*)2X026V0(****)	34.2	1.4	5.4	3.0	125	125
T15N2(*)4X000V0(****)	49.0	2.0	7.7	4.3	45	125
T15N3(*)4X000V0(****)	57.7	2.4	9.1	5.1	60	125
T15N4(*)2X000V0(****)	68.4	2.8	10.8	5.9	125	125
T15N4(*)4X000V0(****)	119.7	4.9	18.9	10.6	125	70
T15N4(*)1X000V0(****)	155.9	6.4	24.6	13.8	125	20
T15N4(*)3X000V0(****)	278.1	9.5	36.0	20.2	125	10

DELUXE MODELS with 7, 15, and 30 GALLON Tanks

DELUXE MODEL NUMBER	MAX OUTPUT @ 0 PSI			Max Strokes Per minute	MAX PSI
	GPH	LPH	OZ/MIN		
T15N4(*)2I026V00	.007-1.4	.027-5.40	.015-3.00	125	125
T15N4(*)2I000V00	.014-2.8	.054-10.8	.030-5.90	125	125
T15N4(*)1I000V00	.032-6.4	.123-24.6	.069-13.8	125	20

VOLTAGE OPTIONS

(*) Replace: 0=115V/60Hz, 1=220V/50Hz, 2=230V/60Hz

(**) Replace: 4=115V/60Hz, 5=220V/50Hz, 6=230V/60Hz

Note: 220V/50Hz units deliver approximately 20% less output

GALLON OPTIONS

(***) Replace: 1=7 Gallon, 2=15 Gallon, 3=30 Gallon

STAR TANKS ONLY

MODEL NUMBER	CAPACITY GAL	LITER
STAR 7	7	26.5
STAR 15	15	57
STAR 30	30	113.5

FLEXFLO® STAR III® METERING SYSTEM

Blue-White's STAR III® Metering System features the FLEXFLO® A-100N Series Peristaltic Metering Pump of your choice, combined with a sturdy Polyethylene tank.


Choose between FLEXFLO'S fixed or variable speed A-100N models, equipped with standard or digital controls.

For an efficient and dependable Peristaltic Metering System Package, get FLEXFLO® STAR III®.

FLEXFLO® STAR III® BENEFITS

- > Three tank capacities to choose from: 7 gallon, 15 gallon, or 30 gallon.
- > All necessary accessories are included.
- > The Polyethylene tank has extra heavy wall thickness for stability with U.V. inhibitor for sunlight protection.
- > Lid positions include open, closed, or vent.
- > Convenient rectangle shape.
- > Raised off the floor for easy wash down.

Note: Refer to the 85000-045 data sheet or visit blue-white.com for more information.

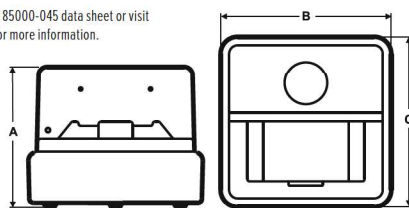

	DIM 'A'	DIM 'B'	DIM 'C'	SHIP WT.
7 GALLON TANK	12.00 (30)	18.50 (47)	18.50 (47)	24 LB. (11 Kg)
15 GALLON TANK	17.25 (44)	20.00 (51)	20.00 (51)	32 LB. (15 Kg)
30 GALLON TANK	27.50 (69)	20.00 (51)	20.00 (51)	38 LB. (18 Kg)



STAR III® with 15 Gallon Tank

